

Information


The Roof Rack Carrier™ makes transporting Power Vacuum Pickup™ and Power Unloader™ hoses really easy. Especially if you have large property. It attaches in seconds, without any tools.

Assembly

Using the diagram at right as a guide, assemble the two cross-struts of your Roof Rack Carrier™.




Attaching to your Cyclone Rake®

1. Unfold the collector and lock the aluminum side tubes in place.
2. Completely remove one clamp knob and loosen the other on the Roof Rack Carrier™ strut.
3. Using the end with the loosened clamp knob, put the stud on the white strut into the hole at the top of the aluminum tube, with the clamp bracket underneath the tube. Tighten. Next fit the other end of the strut onto the aluminum tube and install the clamp bracket and clamp knob. Then just tighten the two clamp knobs until snug.
4. Put on the second strut just like the first one.

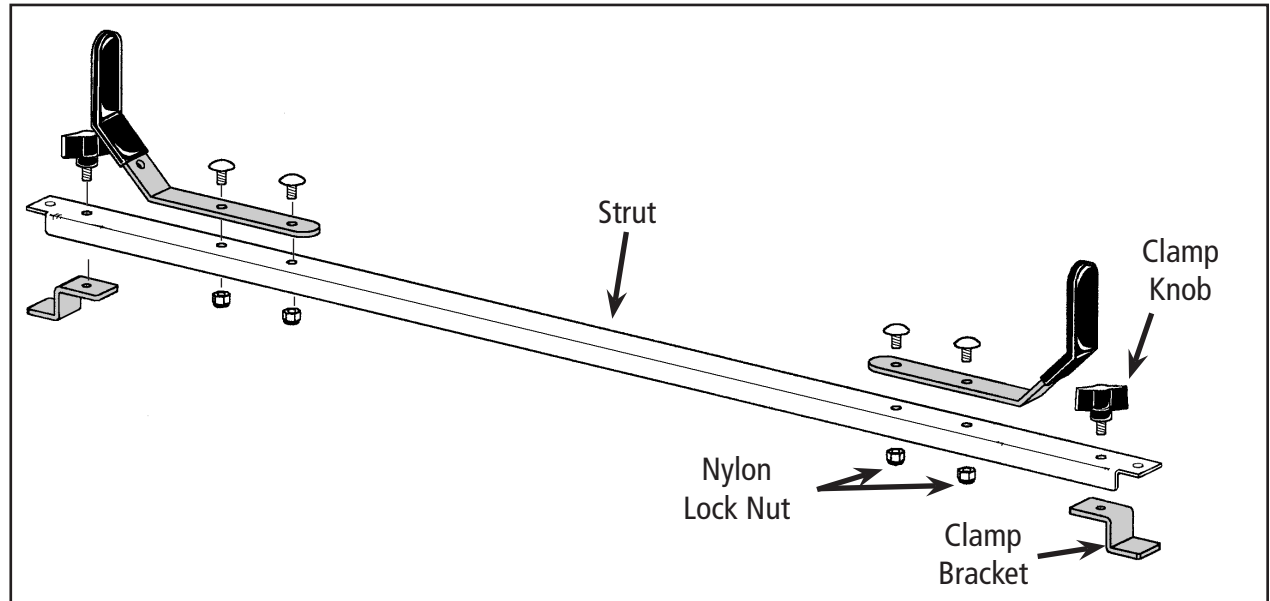

Directions for Use

1. To mount the hose, run it from the blower side, over the two cross-struts to the rear of the collector. Then drape it down the rear of the CYCLONE RAKE® and back up the other side as shown in **figure 1**. Roughly balance the hose lengths on both sides so it won't jog loose when driving.
2. Hook the bungee cords through the holes in the side brackets as shown in **figure 2**. Then stretch the cord over the hose, under the cross strut and back up over the other side of the hose as shown in **figure 3**. Do the same for the front cross strut, using the second bungee cord
3. The Roof Rack Carrier™ is also handy for garden tools, such as rakes, etc.
4. Don't exceed about 30 pounds of weight. The Roof Rack Carrier™ was designed for carrying hoses, not tree branches, lumber, fire wood, pipe.

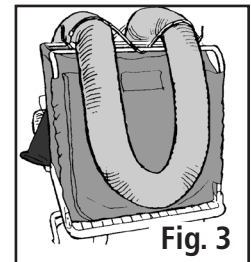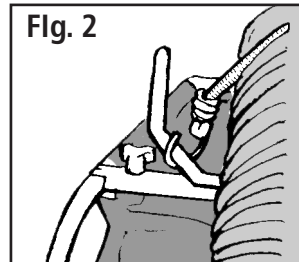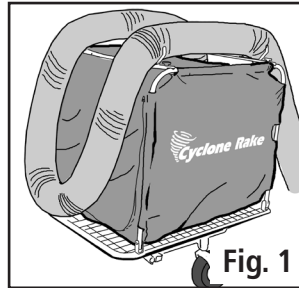

Roof Rack Carrier™ Parts List

ITEM	QTY.
Bungee Cord.....	2
Top Strut.....	2
Hose Hanger Bracket.....	4
Clamp Bracket.....	4
Clamp Knob, 1/4"-20.....	4
1/4"-20 x 1/2" Screw.....	8
1/4"-20 Nylon Lock Nut.....	8