

Long Hitch Leaf Installation

Follow these simple steps to install the Long Hitch Leaf.

Tools Needed: (2) 1/2" Box Wrenches or Sockets

- 1.** Remove both Short Hitch Fork assemblies (A) from the Chassis using the 1/2 inch box wrenches or sockets, and save the bolts washers and lock nuts. See Fig. 1.
- 2.** Then, remove both Hitch Tangs(B) from the Short Hitch Leaves. See Fig. 1.
- 3.** Install the Hitch Tangs onto the Long Hitch Leaves using the bolts washers and lock nuts provided. See Fig. 2.
- 4.** Then install onto the Chassis with the saved hardware. See Fig. 3.

Fig. 1

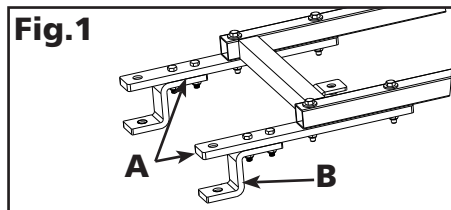


Fig. 2


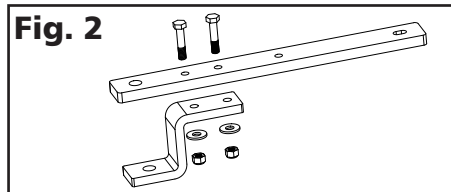


Fig. 3

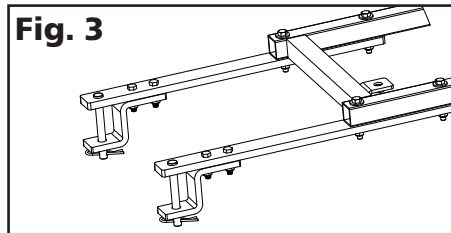

WOODLAND POWER PRODUCTS, INC.

72 Acton Street, West Haven, Connecticut 06516

www.CycloneRake.com

©2016, Woodland Power Products, Inc.

TOLL-FREE 1-(888)-531-RAKE

01-06-202 116