

Follow the instructions below to replace the Top Screen on your SPS-10.



TOOLS YOU'LL NEED: 7/16 Wrench or Socket

Before you begin make sure the Collector Bag and Hose are removed from the Collector Cap.

Remove the old Top Screen from the Collector Cap

1. Release both Clamp Bracket Knobs. Then remove the 2 quick release pins to release the Collector Cap from the handlebar.
2. Place Collector Cap upside down on a flat surface.
3. Remove all 20 nuts with the 7/16" wrench from inside of the Collector Cap. Release the grommets from the PEM studs and remove the old Top Screen.

Note: This may loosen the Collector Cap hinges.

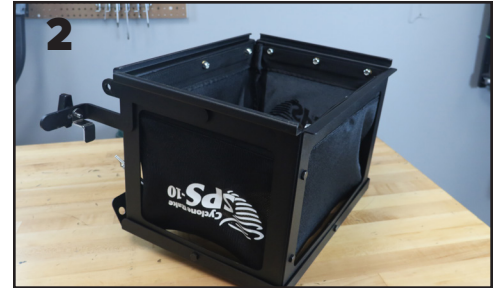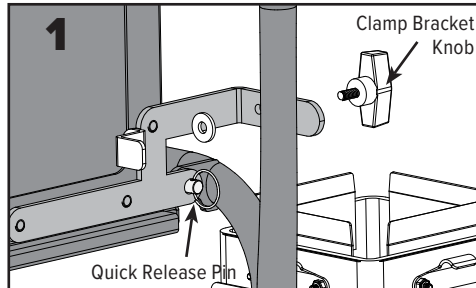

Install the New Top Screen

4. With the Collector Cap still upside down, lay the new Top Screen inside of Collector Cap with logos visible on the outside.
5. First, insert the 4 grommets located around the round Blower inlet hole onto the 4 PEM studs of the Collector Cap. Loosely secure (hand tighten) with 4 of the nylon lock nuts. Then insert the 4 grommets located at the corners onto the 4 PEM studs and loosely secure (hand tighten) with 4 of the nylon lock nuts.
6. Next, starting at one edge of the Collector Cap, attach the 12 grommets and nuts on to the PEM Studs. Hand tighten each nut as you go along.

Note: 4 of the PEM studs also connect to the Collector Cap hinges.



7. Once all 20 nuts on the inside of the Collector Cap are hand tightened, go through and tighten them with the 7/16 wrench to ensure they stay in place.

That's it! Your new Top Screen is installed!